

Datasheet

SETR2641AM1.AN - 1-Button Mini Remote

Product Description

Erone transmitters are robust remotes with rolling code technology and are ideal for automated doors and gates, public or private access, residential or industrial environments. Compatible with any 433 MHz ERONE wireless receiver, a special algorithm ensures a continuous synchronization between the receiver and transmitter.

The SETR2641AM1.AN is a black, 1-channel remote. This model can also be equipped with a passive tag.



Key Features

- Heavy-duty construction
- 820 ft range (250 m), line of sight
- Compatible with standard ERONE receivers
- Batteries included (CR2016)



Certification



DEEE




Certification



14°F to 131°F
(-10°C to 55°C)

Product Specifications

Material:	Plastic
Mounting:	Hand held
Technology:	Radio
Channels:	1
Frequency:	433.92 MHz
Modulation:	AM/ASK
Encoding:	Keeloq® rolling code
Read range:	820 ft (250 m)
Code combinations:	2 ⁶⁴
Weight:	0.5 oz, 14 g

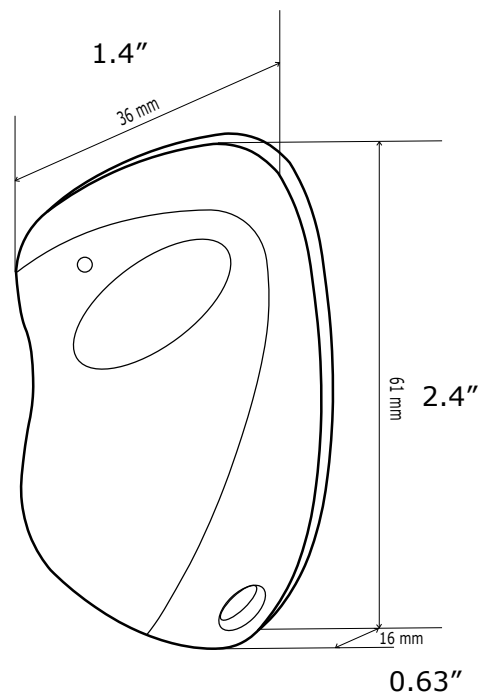

Electrical Specifications

Battery:	6V DC, 2xCR2016 lithium
Consumption:	9 mA

Also available with built-in tag



SETR2641AM1C

Mini remote with CDVI tag



SETR2641AM1HR

Mini remote with HID tag



SETR2641AM1P

Mini remote with PARADOX tag