

Stand Alone Strobes

Universal Mount

ENGINEER AND ARCHITECT SPECIFICATIONS

- Universal Mount
- Low Current Draw - DC or Full Wave
- Very Low Inrush Current
- 24 Vdc Units Available with 15/75, 30/75, 60/75, 75 or 110 Candela Strobes
- Standard Strobe Units or Synchronize Strobe Units with SCM-F Sync Control Module or DSC, Dual Sync Control Units
- Lightweight Plastic Design on New Stand Alone Strobe Units
- Metal Plate Design on Strobe Retro Plate and Weather Proof Stand-Alones (6090V Models are Required)
- Mounting for 4" Square
- Weather Proof Strobe Units, [When Ordering Must Specify a (-1) After the Model (i.e., U-S17-1)], Must be Used with FBX-1 or FBX-2 Weather Proof Back Box
- ADA/UL 1971 Horn-Strobe Versions
- Available for Wall or Ceiling Mount Applications (in Red or White Colors)
- Screw Terminals Accept #12 AWG
- U.L. Listed for Ceiling Mount
-  Listed, CSGM, NYMEA, FM & ULC Approvals Pending



Description

The new Cerberus Pyrotronics' strobes combine state of the art electronics to provide reliability and low current drain to meet visual life safety application. Same low current draw for either wall or ceiling mount installations.

The new strobes are constructed of light durable plastic and is available in two colors: red or white. To order a device in "white" use a "-W" at the end of the model number (i.e., U-S75S-W). The units design provides for easy installation with single gang, double gang or 4 square mounting. The lens construction provides high candela output with a very low current consumption while meeting UL and ADA standards.

The Retro Plate units come with the same strobe choices

with one major physical difference, construction. The retro strobe plate is constructed of metal for mounting bell or chime devices to the plate. Overall dimensions are 6" wide by 9" high.

The remote strobes and strobe remote plates use a Xenon flashtube with solid state circuitry for maximum reliability and efficiency. The full range of new strobes have a rounded dome shape made of clear Lexan®. "FIRE" letters are visible on the front mounting plate. The overall lens is 2.0" x 2 7/8" with a height of 1 3/8".

Strobe units can also be synchronous when used with the SCM-F or DSC sync control units. (See reverse side for ordering information.) If weather proof units are required, order the strobe units with either the FBX-1 or FBX-2 back boxes. Weather proof units are surface mount with metal face plate construction.

CATALOG NUMBER **2539**

Replaces Catalog No. 2533

Ordering Information

Stand-Alone Strobes - Wall Mount

Model Number	Description	Part Number	Strobe Current
U-S17	15/75CD Strobe	500-696460	59 ma
U-S17-W	15/75CD Strobe	500-696461	59 ma
U-S17S	15/75CD Sync Strobe	500-696462	59 ma
U-S17S-W	15/75CD Sync Strobe	500-696463	59 ma
U-S30	30/75CD Strobe	500-696464	88 ma
U-S30-W	30/75CD Strobe	500-696465	88 ma
U-S30S	30/75CD Sync Strobe	500-696466	88 ma
U-S30S-W	30/75CD Sync Strobe	500-696467	88 ma
U-S60	60/75CD Strobe	500-696468	155 ma
U-S60-W	60/75CD Strobe	500-696469	155 ma
U-S60S	60/75CD Sync Strobe	500-696470	155 ma
U-S60S-W	60/75CD Sync Strobe	500-696471	155 ma
U-S75	75CD Strobe	500-696472	166 ma
U-S75-W	75CD Strobe	500-696473	166 ma
U-S75S	75CD Sync Strobe	500-696474	170 ma
U-S75S-W	75CD Sync Strobe	500-696475	170 ma
U-S110	110CD Strobe	500-696476	249 ma
U-S110-W	110CD Strobe	500-696477	249 ma
U-S110S	110CD Sync Strobe	500-696478	249 ma
U-S110S-W	110CD Sync Strobe	500-696479	249 ma

Stand-Alone Strobes - Ceiling Mount


Model Number	Description	Part Number	Strobe Current
U-S17-C	15/75CD Strobe	500-696874	59 ma
U-S17-W-C	15/75CD Strobe	500-696875	59 ma
U-S17S-C	15/75CD Sync Strobe	500-696876	59 ma
U-S17S-W-C	15/75CD Sync Strobe	500-696877	59 ma
U-S30-C	30/75CD Strobe	500-696878	88 ma
U-S30-W-C	30/75CD Strobe	500-696879	88 ma
U-S30S-C	30/75CD Sync Strobe	500-696880	88 ma
U-S30S-W-C	30/75CD Sync Strobe	500-696881	88 ma
U-S60-C	60/75CD Strobe	500-696882	155 ma
U-S60-W-C	60/75CD Strobe	500-696883	155 ma
U-S60S-C	60/75CD Sync Strobe	500-696884	155 ma
U-S60S-W-C	60/75CD Sync Strobe	500-696885	155 ma
U-S75-C	75CD Strobe	500-696886	166 ma
U-S75-W-C	75CD Strobe	500-696887	166 ma
U-S75S-C	75CD Sync Strobe	500-696888	170 ma
U-S75S-W-C	75CD Sync Strobe	500-696889	170 ma
U-S110-C	110CD Strobe	500-696890	249 ma
U-S110-W-C	110CD Strobe	500-696891	249 ma
U-S110S-C	110CD Sync Strobe	500-696892	249 ma
U-S110S-W-C	110CD Sync Strobe	500-696893	249 ma

Strobe currents are Full Wave / Filtered

UL environmental ratings 32°F to 120°F, (0°C to 49°C) with 85% humidity. Outdoor, -31°F to 150°F (-35°C to 66°C), RH at 95%.

Note: For weather proof units, order model number FWB-1 or FWB-2 back box.

Wiring

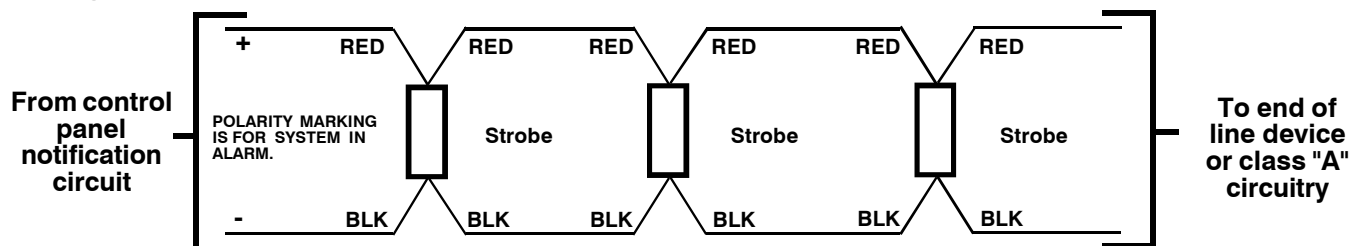

Accessories

Model Number	Description	Model Number	Description
FWB-1	Weather Proof Box 1/2" Pipe	FBX-S	1.7"D Flush or Surface Box for Horn / Strobe
FWB-2	Weather Proof Box 3/4" Pipe	FBX-F	2.7"D Flush or Surface Box for Horn / Strobe
FIB	Indoor Surface Box	FBX-SF	2.7"D Flush Box for Horn / Strobe

(Add -C for Canadian ULC listed model)

(Add -CF for Canadian French ULC listed model)



Cerberus Pyrotechnics
8 Fernwood Road
Florham Park, NJ 07932
Tel: (973) 593-2600
FAX: (973) 593-6670
Website: www.cerbpyro.com

7/98
10M
CPY-IG
Printed in U.S.A.

Cerberus Pyrotechnics
50 East Pearce Street
Richmond Hill, Ontario
L4B, 1B7 CN
Tel: (905) 764-8384
FAX: (905) 731-9182

July 1998
Supersedes sheet dated 3/98
Replaces catalog number 2533